

RELEASE DATE 2023.04.11 - REF ECR 505

SUGGESTED SOURCE OF SUPPLY:


1. FIRESLEEVE: BENTLY HARRIS
241 SELSH POOL ROAD
LOINVILLE, PA. 19353
(610)363-2600

△ APPLY END DIP TO FIRESLEEVE, PARKER P/N 5027 OR EQUIVALENT.

△ APPLY STAINLESS IDENTIFICATION LABEL. ASSURE APP'N TO FLEXIBLE HOSE SECTION.


△ SECURE ENDS WITH STAINLESS BANDS P/N 10781-4-22CR
ALT. METHOD: SECURE ENDS WITH SAFTY WIRE P/N MS20995C32.

△ OPTIONAL, '407AC-5200-X-Z' USING ES40300-X-Z,
MAY BE PROVIDED TO ADDRESS INDIVIDUAL NEEDS:
'X' = ORIG. DASH #. 'Z' = ADDED LENGTH. MODIFY
HOSE BAND TO INCLUDE 'Z'.




-11 HOSE BAND

MATERIAL: MFR'D FROM 0.006 STAINLESS STEEL
ALT. MATERIAL: 23056-4-20 TAG
NOTES: TEXT OVERSIZED FOR CLARITY



-12 HOSE BAND


MATERIAL: MFR'D FROM 0.006 STAINLESS STEEL
ALT. MATERIAL: 23056-4-28 THRU 23056-5-4 TAG
NOTES: TEXT OVERSIZED FOR CLARITY



-13 HOSE BAND

MATERIAL: MFR'D FROM 0.006 STAINLESS STEEL
MATERIAL: 23056-4-28 THRU 23056-5-4 TAG
NOTES: TEXT OVERSIZED FOR CLARITY

SHEET	REV	ECO	DATE	DESCRIPTION	BY	CHK	APR
1	A		10/16/97	ADDED -3 ASSY	REB	LS	REB
1	B		12/22/00	ADDED -4 ASSY, NOTES 2, 3, & 4 AND ES40300 PARTS	MR	LS	MR
1	C		06/27/03	ADDED P/N 407AC-5200-X HOSE BAND	REB	LS	REB
1	D		04/07/08	11/27/07: ADDED NOTE 5. 04/07/08: FIRESLEEVE REF DIMS WERE FINAL TUBE DIMS. BH-18 WAS 19' ON -1, BH-12 WAS 16'/17.5'/12' ON -2/-3/-4.	REB	LS	REB
1	E		07/02/20	ADDED -5 ASSY. FIRESLEEVE INCREASED ON -1 THRU -4, WAS 18'/15'/16'/11' RESPECTIVELY.	DT	LS	ZA
1	F		04/14/21	ADDED SHEET 2 AND FINAL SENTENCE TO NOTE 5. REPLACED 407AC-5200-X WITH -11 THRU -15, UPDATED BOM.	DT	LS	ZA
1	G		11/29/21	-11 THRU -15: ADDED ALT. MATERIAL, REMOVED EXCESS DIMS, INCREASED LENGTH OF -12 & -13	ZA	DT	ZA

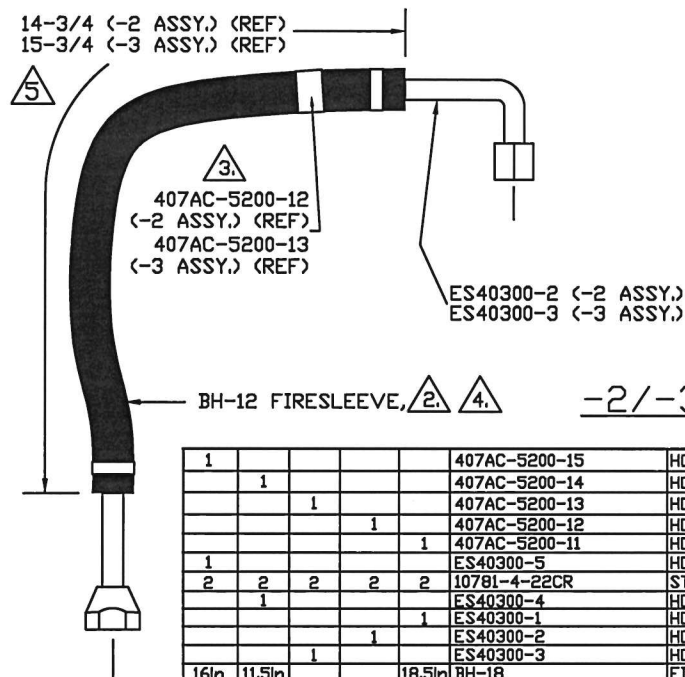

-2/-3 ASSEMBLIES

1					407AC-5200-15	HOSE BAND	
	1				407AC-5200-14	HOSE BAND	
		1			407AC-5200-13	HOSE BAND	
			1		407AC-5200-12	HOSE BAND	
				1	407AC-5200-11	HOSE BAND	
1					ES40300-5	HOSE ASSEMBLY	
2	2	2	2	2	10781-4-22CR	STAINLESS BANDS	
	1				ES40300-4	HOSE ASSEMBLY	
				1	ES40300-1	HOSE ASSEMBLY	
			1		ES40300-2	HOSE ASSEMBLY	
				1	ES40300-3	HOSE ASSEMBLY	
16in	11.5in			18.5in	BH-18	FIRESLEEVE	STOCK LENGTH
-5	-4	-3	-2	-1	BH-12	FIRESLEEVE	STOCK LENGTH
ASSY	ASSY	ASSY	ASSY	ASSY	PART NUMBER	DESCRIPTION	SPECIFICATION
QTY.	QTY.	QTY.	QTY.	QTY.			

<div>✓</div> <div>Paravion® Technology Inc.</div>	TITLE				DRAWING NO.				
	HOSE ASSEMBLIES				407AC-5200				
	DIMENSIONS IN INCHES								
	TOLERANCES EXCEPT WHERE NOTED:								
DRAWN BY		APRVD. BY		CHK'D BY		DATE	REV	ECO	
RHSM		REB		LS		05/15/97	G		
.X = ± .1		DO NOT SCALE DRAWING						SHEET	
.XX = ± .05									
.XXX = ± .010		© 2021 PARAVION TECH., INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY, INC.						1 OF 2	
ANGLES = ± 1°									

PROTO

N/C


.X = ± .1
.XX = ± .05
.XXX = ± .010

ANGLES = ± 1°

SUGGESTED SOURCE OF SUPPLY:


SUGGESTED SOURCE OF SUPPLY:

1. FIRESLEEVE: BENTLY HARRIS
241 SELSH POOL ROAD
LOINVILLE, PA. 19353
(610)363-2600
- △ APPLY END DIP TO FIRESLEEVE, PARKER P/N 5027 OR EQUIVALENT.
- △ APPLY STAINLESS IDENTIFICATION LABEL. ASSURE APP'N TO FLEXIBLE HOSE SECTION.
- △ SECURE ENDS WITH STAINLESS BANDS P/N 10781-4-22CR
ALT. METHOD: SECURE ENDS WITH SAFTY WIRE P/N MS20995C32.
- △ OPTIONAL, "407AC-5200-X-Z" USING ES40300-X-Z,
MAY BE PROVIDED TO ADDRESS INDIVIDUAL NEEDS:
"X" = ORIG. DASH #. "Z" = ADDED LENGTH. MODIFY
HOSE BAND TO INCLUDE "Z".




-14 HOSE BAND


MATERIAL: MFR'D FROM 0.006 STAINLESS STEEL
ALT. MATERIAL: 23056-4-20 TAG
NOTES: TEXT OVERSIZED FOR CLARITY

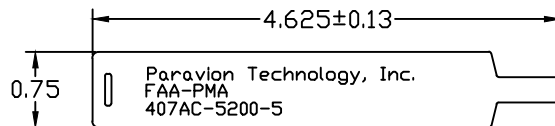

-15 HOSE BAND

MATERIAL: MFR'D FROM 0.006 STAINLESS STEEL
ALT. MATERIAL: 23056-4-20 TAG
NOTES: TEXT OVERSIZED FOR CLARITY

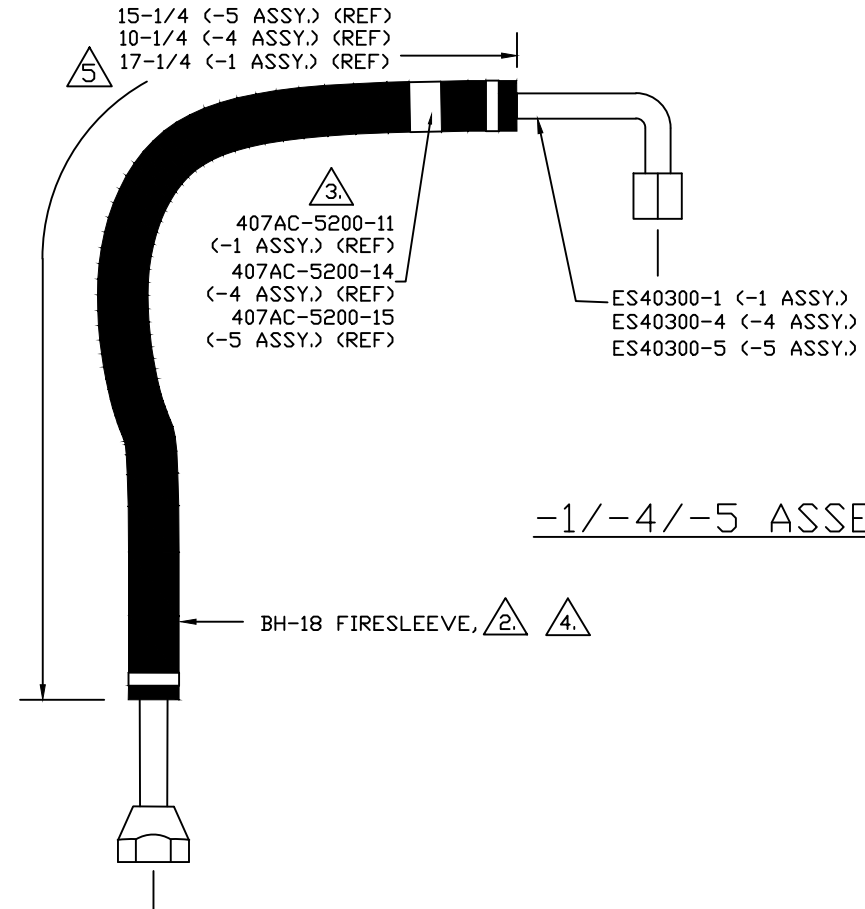

 Paravion® Inc. Technology	TITLE HOSE ASSEMBLIES			DRAWING NO. 407AC-5200	
	DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED: .X = ± .1 .XX = ± .05 .XXX = ± .010 ANGLES = ± 1°				
DRAWN BY RHSM	APRVD. BY REB	CHK'D BY LS	DATE 05/15/97	REV G	ECO
DO NOT SCALE DRAWING				SHEET 2 OF 2	
© 2021 PARAVION TECH., INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY, INC.					